JDYT Submerged Level Meter(sensor)

Feature

- □ Minimum measuring range 0-1m.
- ☐ Maximum measuring range 0-1000m.
- u waterproof wire or Stainless steel wire.
- Lightning protection and protection radio frequency interference
- □ Intrinsically safe explosion-proof or flameproof
- □ Small size, beautiful appearance, high cost performance
- □ High precision, high stability, high reliability


Technical details

zedl)
teel

Stainless Steel Materials Wire


less Steel Har

Product Dimension

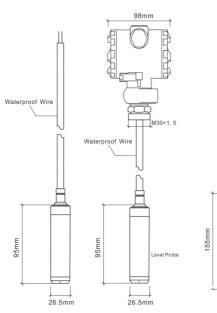

Electric Connection

4~20mADC Output:

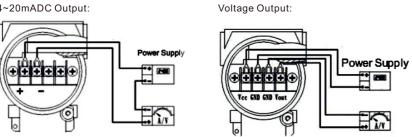

32m

Application

□ It can using Liquid level measurement of various media in petrochemical, metallurgical, power, pharmaceutical, water supply and drainage, environmental protection systems and industries.





2#



3#

■□ Model Selection Catalog

Code Hydrostatic Type A 1# G 2# S 3# Code Measuring Range measuring range measuring range 1 0-1m 11 0-50m 2 0-5m 12 0-100m 3 0-10m 13 0-200m 4 0-15m 14 0-300m 5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0.800m 10 0-45m 20 0-1000m 10 0-45m 20 0-1000m 11 4-20mA DC M2 0-5V M3 1-5V M4 0-10V Code Process co Process co	Accuracy ±0.5% ±0.25% ±0.25% ±0.25% ±0.25% ±0.25% ±0.25%		
$ \begin{array}{ c c c c c c c } \hline G & 2\# \\ \hline S & 3\# \\ \hline \\ \hline S & & & & & & \\ \hline & & & & & \\ \hline & & & & &$	$\begin{array}{c} \pm 0.5\% \\ \pm 0.25\% \end{array}$		
S 3# Code Measuring Range 1 0-100 2 0-5m 12 0-100m 3 0-10m 13 0-200m 4 0-15m 14 0-300m 5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m M1 4-20mA DC M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	$\begin{array}{c} \pm 0.5\% \\ \pm 0.25\% \end{array}$		
Code Measuring range 1 0-1m 11 0-50m 2 0-5m 12 0-100m 3 0-10m 13 0-200m 4 0-15m 14 0-300m 5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V 0-10V 0-10V	$\begin{array}{c} \pm 0.5\% \\ \pm 0.25\% \end{array}$		
CODE measuring range measuring range 1 0-1m 11 0-50m 2 0-5m 12 0-100m 3 0-10m 13 0-200m 4 0-15m 14 0-300m 5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V 0-10V 0-10V	$\begin{array}{c} \pm 0.5\% \\ \pm 0.25\% \end{array}$		
CODE measuring range measuring range 1 0-1m 11 0-50m 2 0-5m 12 0-100m 3 0-10m 13 0-200m 4 0-15m 14 0-300m 5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V 0-10V 0-10V	$\begin{array}{c} \pm 0.5\% \\ \pm 0.25\% \end{array}$		
2 0-5m 12 0-100m 3 0-10m 13 0-200m 4 0-15m 14 0-300m 5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m M1 4-20mA DC M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25% ±0.25% ±0.25% ±0.25% ±0.25%		
3 0-10m 13 0-200m 4 0-15m 14 0-300m 5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m M1 4-20mA DC M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25% ±0.25% ±0.25%		
4 0-15m 14 0-300m 5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25% ±0.25%		
5 0-20m 15 0-400m 6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m Kl Code Output Singal M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25%		
6 0-25m 16 0-500m 7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V			
7 0-30m 17 0-600m 8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m Kl Code Output Singal M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25%		
8 0-35m 18 0-700m 9 0-40m 19 0-800m 10 0-45m 20 0-1000m Code Output Singal M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V			
9 0-40m 19 0-800m 10 0-45m 20 0-1000m Code Output Singal M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25%		
10 0-45m 20 0-1000m Code Output Singal M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25%		
Code Output Singal M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25%		
M1 4-20mA DC M2 0-5V M3 1-5V M4 0-10V	±0.25%		
M2 0-5V M3 1-5V M4 0-10V			
M3 1-5V M4 0-10V			
M4 0-10V			
Code Process co			
	cess connection 30*1.5 2 #		
P1 M30*1.5			
P2 M35*1.5			
P3 Tri-Clam			
PX Custom desi	-		
Code Additio	nal Function		
	y or LED display		
M4 Without dis			
M5 Aluminum			
d Ex d IIC h High temp			
c -20~80 deg			
4 SUS 304			
L SUS 316L			
• • • • • • •			
JDYT G 03 M1 P1 M3M5CL			